



Tachometer Transducers

AI-Tek tachometer transducers are self-generating units when used with speed sensors. They are designed primarily to provide an easy means of attaching a pulse generating assembly to rotating shafts. Sensor gap-ping, shaft run-out and mounting problems are eliminated. This makes the unit especially useful for shafts with high run-out. Refer to chart information for selecting a unit for your application. The ordering map on the following page provides information for selecting a unit for your application. Please note that sensors and cable assemblies must be ordered separately.

Taper-Lock® Type

The assembly consists of a Taper-Lock bushing which enables quick attachment to rotating shafts. The transducer employs a rotor with small perforations along its periphery; a permanently lubricated sealed bearing; an outer ring and a reference rod which, when clamped in position, prevents the outer ring assembly from moving. The outer ring can accommodate up to four speed sensors for use in monitoring directions of rotation and speed.

Sleeve Type

The **AI-Tek** sleeve-type transducer assembly is identical to the Taper-Lock type except that it provides a sleeve bushing with two set screws for installation purposes, allowing larger shaft sizes.

Mechanical Specifications

Lubrication: Bearings are permanently lubricated; do not use pressure washes or solvents.

Finish: Reference rod and outer ring are anodized aluminum.

Reference Rod : 1/4" diameter, 6" long

Bearing Limits: 4000 RPM max. speed

Weight: 54 oz. (1.53 kg) max.

Sensor Mounting: Refer to chart for mating sensor thread

Electrical Specifications

Output Frequency: 30 pulses/rev. (1 Hz = 2RPM),
Standard; 60 pulses/rev. (1 Hz = 1RPM),
Optional.

Gap Range: Normal gap setting range from 0.005 to 0.020 inches.


Refer to chart information for gap change, per turn of sensor (inches)

Ambient Temperature: -25°C to +100°C

NOTE: Not for use in abrasive atmospheres.


Ease of Installation

Ordering Map T 79850-103 - ☐ ☐ ☐

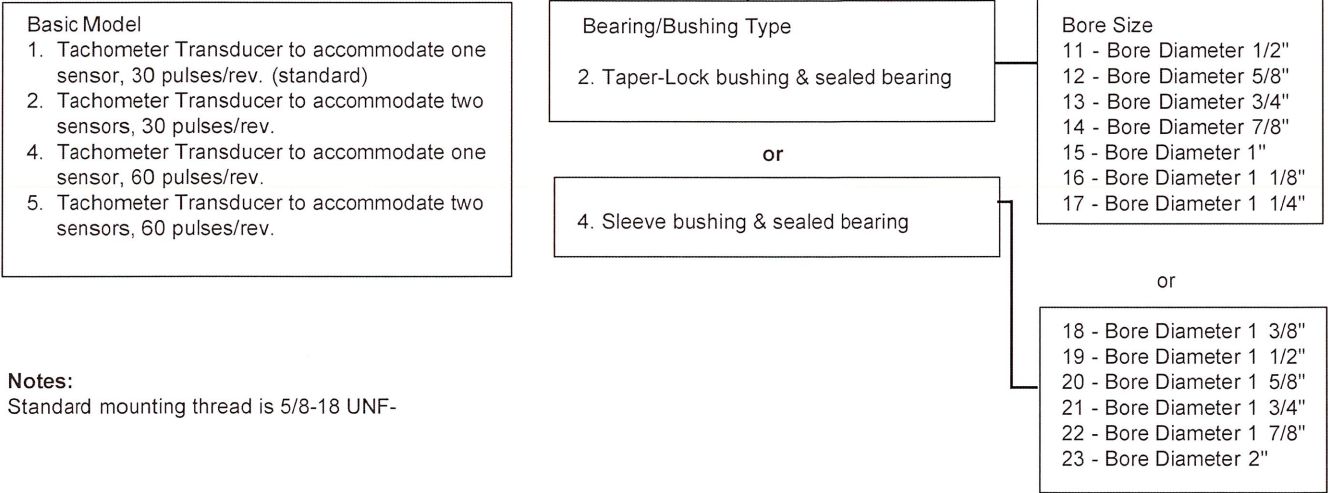


Notes:
Standard mounting thread is 5/8-18 UNF-

FIGURE 1 – WITH SLEEVE BUSHING HUB

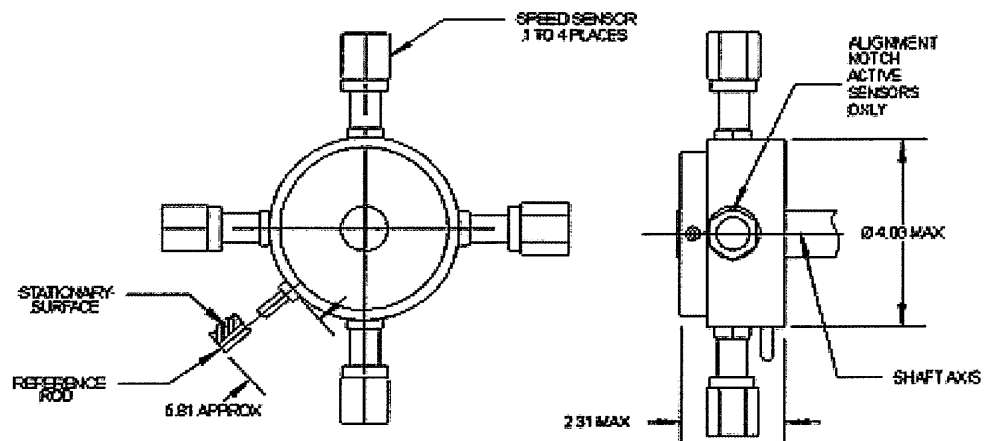

DIMENSIONS IN INCHES

FIGURE 2 – WITH TAPER-LOCK BUSHING HUB

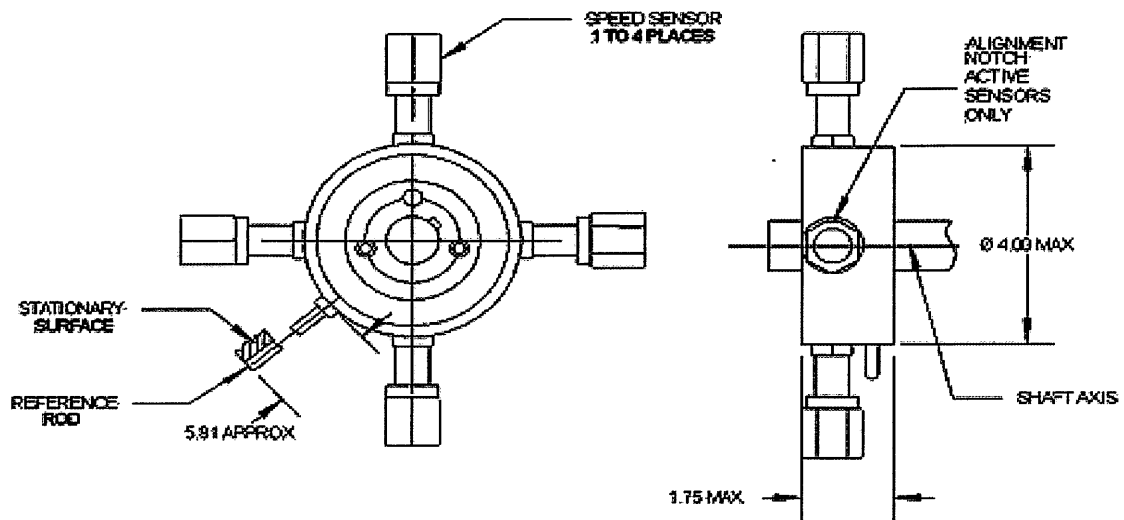

DIMENSIONS IN INCHES